


LEAD-FREE COPPER ALLOY GLOBE

CLASS 125


Screw-In-Bonnet • Rising Stem • Conventional Plug Disc

*NSF/ANSI 61-G & NSF/ANSI 372

CODE #811 (AK125CN) THREADED (½"-2")

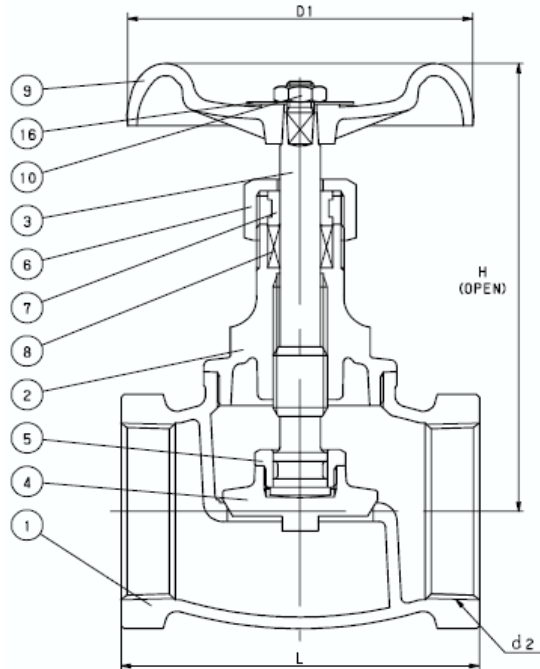

CODE #812† (C125CN) SOLDER (½"-2")

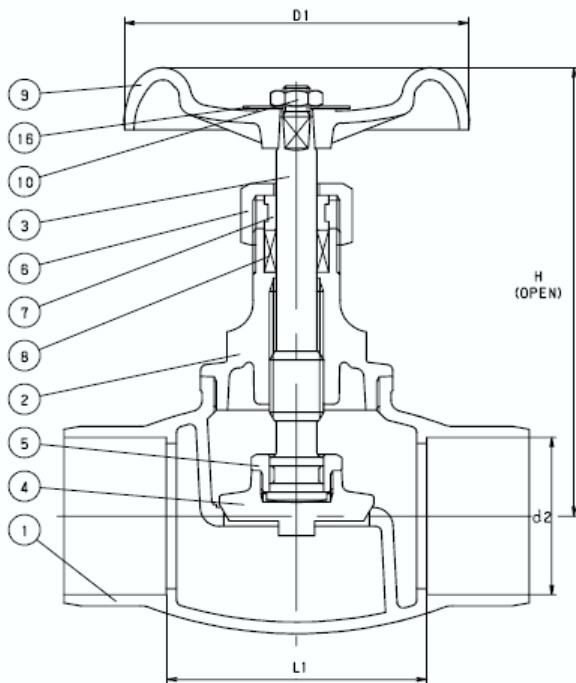

STANDARDS

END TO END	KITZ STD.
THREADED ENDS	ASME B1.20.1
SOLDER ENDS	ASME B16.18†
DESIGN	MSS SP-80, Type 1*

PRESSURE - TEMPERATURE

200 PSI - NON-SHOCK COLD WORKING PRESSURE (CWP)
125 PSI - WORKING STEAM PRESSURE (WSP)

MATERIAL LIST

NO.	NAME OF PART	SPECIFICATION
1	BODY	LF CAST BRONZE (C89530)
2	BONNET	LF FORGED BRASS (C46750)
3	STEM	LF BRASS ROD (C46750)
4	DISC	LF FORGED BRASS (C46750) LF CAST BRONZE (C89530)
5	LOCK NUT	LF BRASS ROD (C46750)
6	PACKING NUT	FORGED BRASS (C37700)
7	GLAND ¾"-2"	BRASS ROD (B16)
8	GLAND PACKING	ARAMID FIBER w/ GRAPHITE
9	HAND WHEEL	ALUMINUM DIE-CAST
10	WHEEL NUT	CARBON STEEL
16	NAME PLATE	ALUMINUM

* LEAD FREE MATERIALS NOT LISTED UNDER SP-80, TABLE 2

† P-T LIMITS FOR SOLDER JOINT VALVES PER ASME B16.18

DIMENSIONS & WEIGHTS

SIZE	d2	H	D1	L	L1	d1		Wt. Lb/Kg	Crtn Qty
						Max	Min		
in ½	2.99	2.36	2.09	1.52	0.631	0.627	0.71		
mm ½	75.9	59.9	53.1	38.6	16.0	15.9	0.3		
in ¾	3.86	2.76	2.56	1.8	0.881	0.877	1.37		
mm ¾	98.0	70.1	65.0	45.7	22.4	22.3	0.6		
in 1	4.25	3.15	3.03	2.12	1.132	1.128	1.8		
mm 1	108.0	80.0	77.0	53.8	28.8	28.7	0.8		
in 1¼	5.39	3.54	3.35	2.6	1.382	1.378	2.63		
mm 1¼	136.9	89.9	85.1	66.0	35.1	35.0	1.2		
in 1½	6.3	3.94	3.94	2.94	1.633	1.628	3.88		
mm 1½	160.0	100.1	100.1	74.7	41.5	41.4	1.8		
in 2	7.09	4.53	4.69	3.43	2.133	2.128	6.63		
mm 2	180.1	115.1	119.1	87.1	54.2	54.1	3.0		

This product complies with NSF/ANSI Standard 61, NSF 372 and conforms to lead content requirements for "Lead Free" plumbing as defined by CA, VT, MD, and LA state laws and the U.S. Safe Drinking Water Act that went into effect January 4, 2014.

